

GA SERIES

Ultra Performance CNC Turning Centers



THE ULTIMATE MACHINING POWER
WOODWAY®

ULTRA PERFORMANCE TURNING CENTERS

Engineered to handle heavy-duty turning applications with superb accuracy, the GA series ultra performance turning centers combine extremely powerful high torque motors, super rigid box way constructions, and large diameter servo indexing turrets to bring you The Ultimate Machining Power®. The GA series will help you be more competitive by achieving faster cycle times with heavier cuts, faster machine movements, and allow cutting of tough material efficiently. You'll also appreciate the reliability and durability that our machines are known for. Plus, with more standard features than any other machine on the market today, many say it's the best investment they have ever made.

- ▶ Extremely powerful high-torque spindles deliver 2.5 ~ 4 times the torque output of standard spindles.
- ▶ Extra large Z-axis servo motors provide the thrust needed to efficiently drill big diameter holes.
- ▶ In order to endure the machine's high outputs with durability, heavy-duty roller bearings are used to support the spindles and axes guide ways are of super-rigid one-piece box ways.



(GA-2000 series model shown.)



(GA-3000 series model shown.)

GA series of all models (total 36 models)

SERIES		GA-2000 SERIES			GA-3000 SERIES		
Chuck Size		8"	8" / 10"	10"	10"	12"	15"
Bar Capacity		Ø 51 mm (2.0")	Ø 65 mm (2.5")	Ø 77 mm (3.0")	Ø 75 mm (2.9")	Ø 90 mm (3.5")	Ø 105 mm (4.0")
Turning Length	300 mm* ¹	GA-2000/300 / 300M	GA-2600/300 / 300M	GA-2800/300 / 300M	—	—	—
	600 mm* ¹	GA-2000 / M	GA-2600 / M	GA-2800 / M	GA-3000 / M	GA-3300 / M	GA-3600 / M
	900 mm* ¹	—	—	—	GA-3000/900 / 900M	GA-3300/900 / 900M	GA-3600/900 / 900M
	1,200 mm* ¹	GA-2000L / LM	GA-2600L / LM	GA-2800L / LM	GA-3000L / LM	GA-3300L / LM	GA-3600L / LM

/300 : Compact Bed /900 & L : Long Bed M : Live Tooling & C-axis

*1 Turning length listed here are approximate numbers, individual models may vary. Please see machine specifications page for details.

- ▶ The modern 30° slant wedge bed design provides smooth chip disposal and easier operator access without sacrificing machine rigidity.
- ▶ Larger machining capacities and available live tooling features provide additional production flexibility.

1
2



(GA-3300L model shown.)


GA series machines (excluding compact bed GA-2000/300 models) feature a standard programmable base and quill tailstock.

- ▶ Manual mode quill-jog function allows the quill to be inched forward, which makes it easier to insert the center into the center hole.
- ▶ Movement of the base and quill in auto mode are controlled by M-codes and thrust pressure is manually adjustable.
- ▶ Z-axis carriage automatically locks onto the tailstock base and moves it to the desired position with precision accuracy.



Tailstock shown with optional live center


Machine rigidity is increased by eliminating the opening required for under-machine-type coolant tanks.

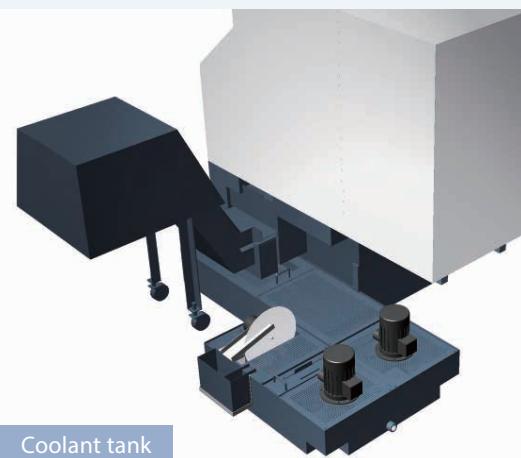

- ▶ Utilizing unused space, this larger 145 L coolant tank placement allows optimal air circulation for faster heat dispersion and lower coolant temperature, which will help extend coolant life.
- ▶ Heat escapes directly into the air, not trapped inside the machine; this tremendously improves the machine's overall accuracy by lowering thermal expansion effects to a minimum.
- ▶ Coolant tank allows the connection of compressed air to circulate coolant and keep it fresh when machine is not in use.

GA-2000/300 COMPACT DESIGN SERIES

- ▶ By using the same super rigidity design, GA-2000/300 series only needs 3.3 m² floor space which makes much more flexible for space usage.
- ▶ Back-exit conveyor design is suitable for central conveyor gathering arrangement which can efficiently lower manpower.

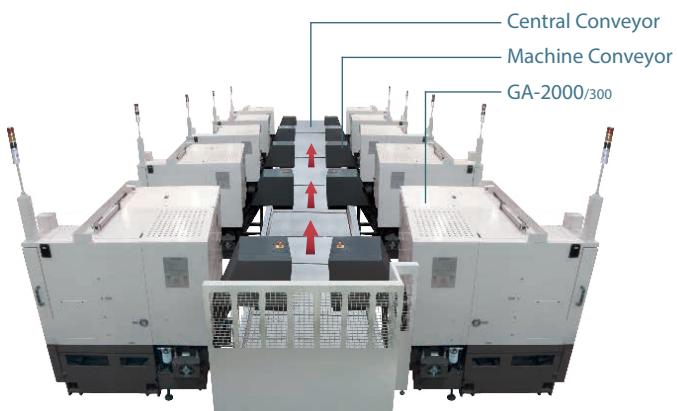

Customized Equipment


- ▶ Integrated the characteristics of GA-2000/300 and great engineering, GOODWAY is capable to develop all sort of specialized and customized equipment for customers. GOODWAY is selected by well-known automobile corporations.

Robot Arm

- ▶ Featured robotic arm, loading and unloading can be done in one setup which is pretty safe and quick to fulfill needs of mass production.



(Robotic arm)

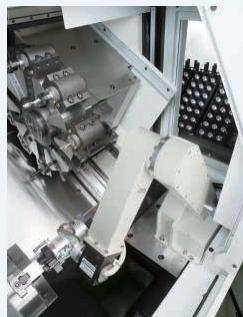


(Gantry type robotic arm)

SUPER RIGIDITY STRUCTURE

3
4

- ▶ The low center of gravity heavy-duty bed and 30° slant wedge saddle design provide a super rigid foundation for the headstock, turret, and tailstock.
- ▶ Built to withstand years and years of rigorous high production turning, the heavily ribbed, one-piece thermally balanced bed and casting components are of " MEEHANITE " casting.
- ▶ By using Finite Element Analysis (FEA), optimal reinforce ribbings are directly cast into the one-piece bed structure. Mechanical rigidity has been increased by more than 30% when compared to conventional designs.

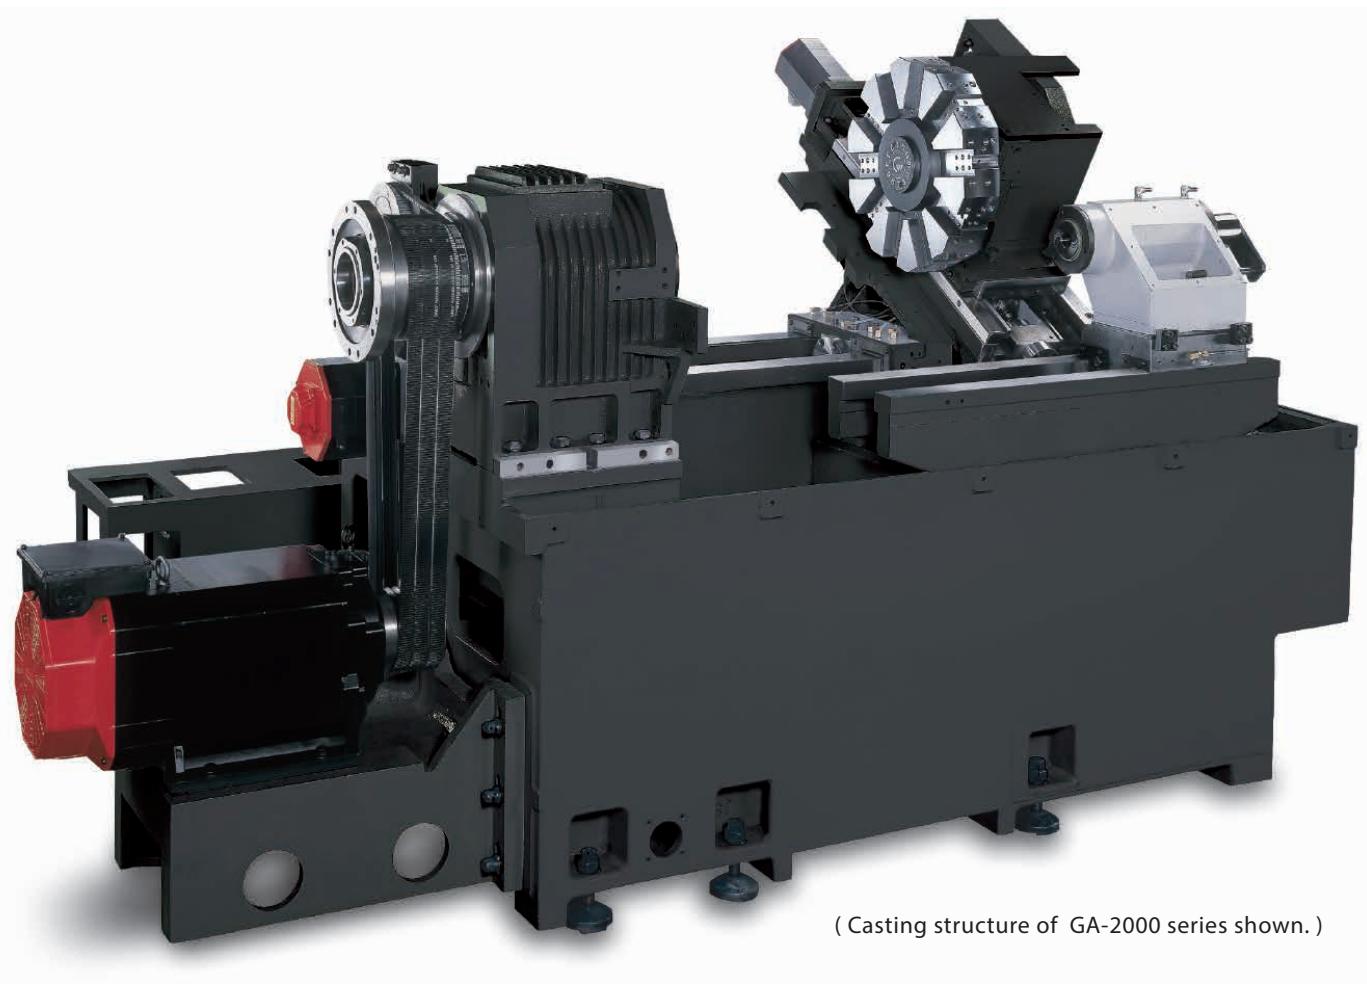


(Casting structure of GA-2000 series shown.)



- ▶ Contact surfaces of all slides, headstock, turret, tailstock, and ball screw bearing housings with the machine bed are hand scraped to provide maximum assembly precision, structural rigidity, and load distribution.

SUPER RIGIDITY STRUCTURE



- ▶ All spindle and servo motors, including drives, are FANUC αi series components to ensure peak machining performance and accuracy.
- ▶ X and Z axes are driven by over-sized FANUC AC αi series absolute servo motors, providing tremendous thrust outputs with faster acceleration and deceleration. Absolute encoder technology eliminates the use of limit switches, thus, eliminating referencing axes to home positions and broken limit switches.

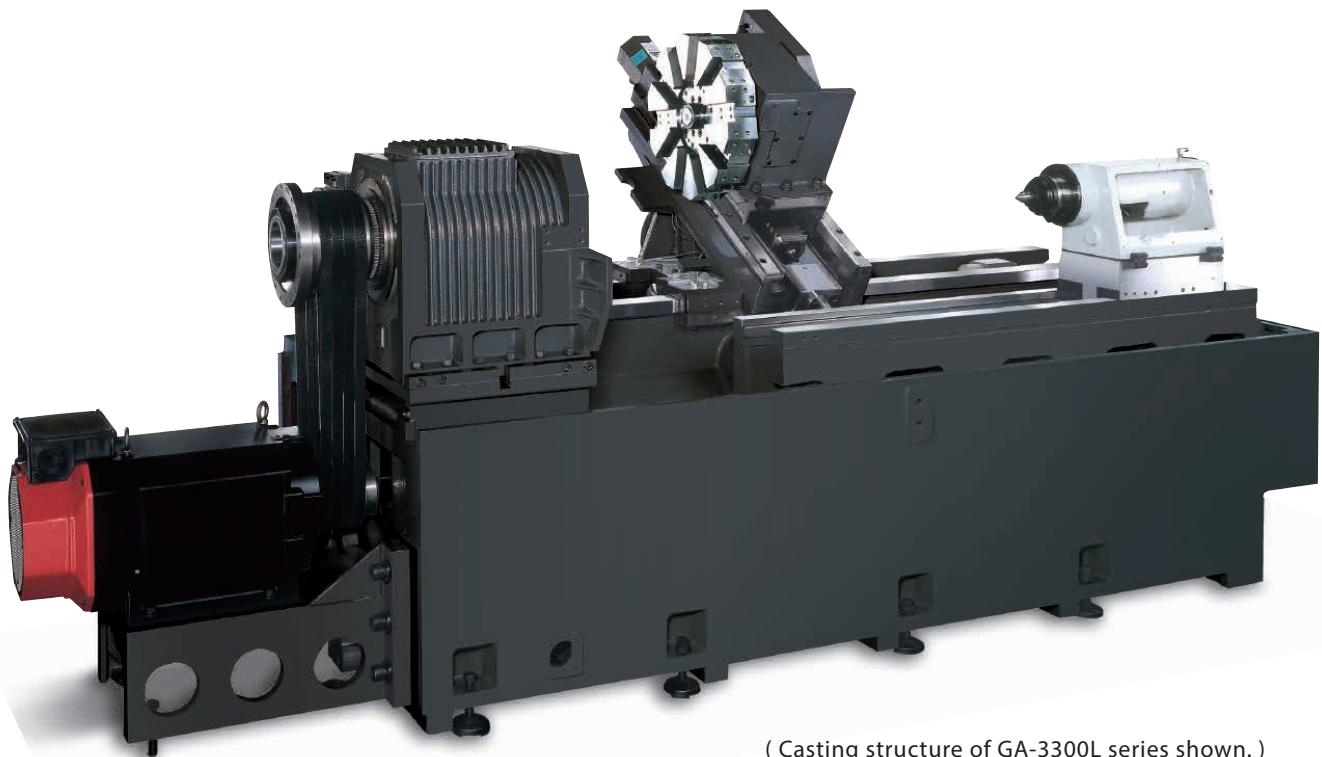


(Casting structure of GA-3300L series shown.)

Mechanical Design


- ▶ Utilizing the latest 3D CAD design software to assist in machine development, and FEA (Finite Element Analysis) to provide engineering analysis, we are able to create the best designs possible.

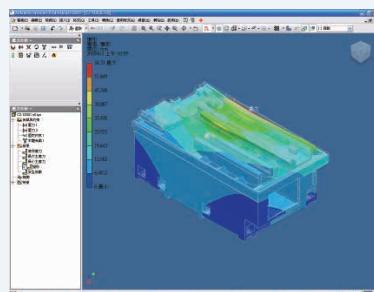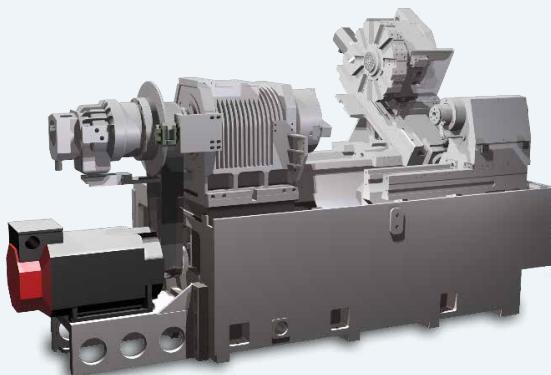


- ▶ Head stocks feature even thickness sides, which evenly distribute cutting forces to the machine bed, resulting in exceptional vibration dampening characteristics and forms a stronger structure to handle interrupted and heavy cutting applications.

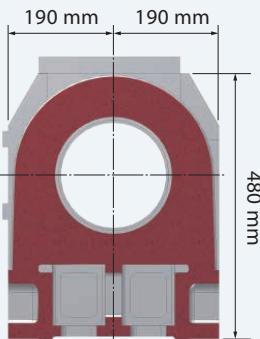

- ▶ Heat dispensing fins around the headstock evenly dispense heat to reduce deformation, therefore, increasing machining accuracy.


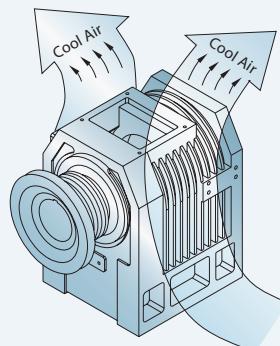


- ▶ Slide ways are bonded with "Turcite B" to eliminate stick-slip, minimize wear and maintain long term accuracy. Rapids are 20 m/min. on X-axis & 24 m/min. on Z-axis.

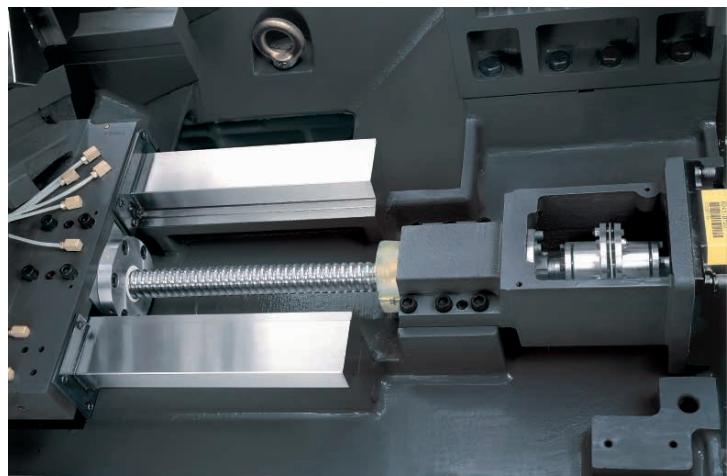

- ▶ C3 class hardened and precision ground ball screws ensure the highest accuracy and durability possible. Plus, pretension on all axes minimizes thermal distortion.

- ▶ Extra wide, hardened and precision ground box ways are widely spaced, and directly cast on to the machine bed and saddle for maximum strength and precision. The box way design also provides the rigidity needed for heavy-duty and interrupted turning applications.

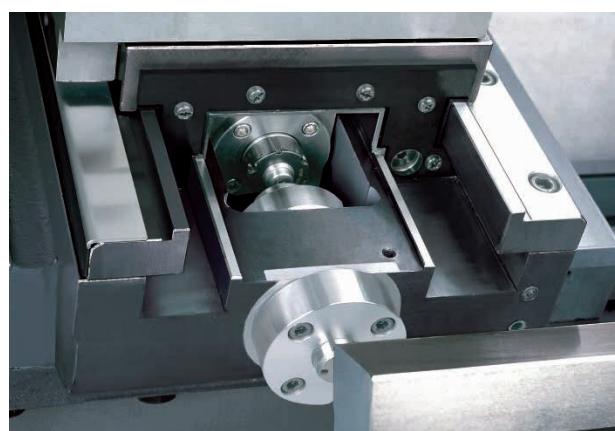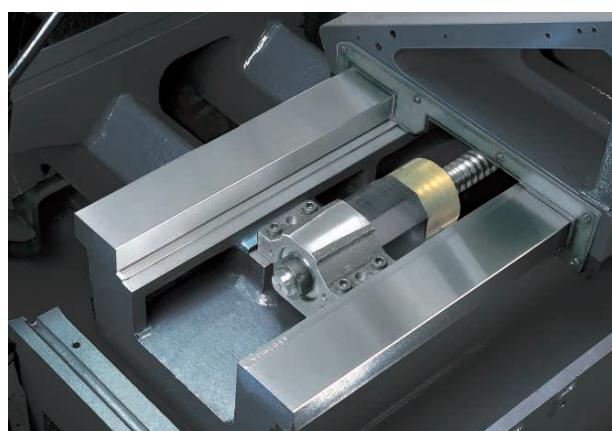


ULTIMATE TURNING POWER

- P4 grade (Class 7) super-high precision bearings are directly assembled for maximum level of support and precision. Bearing configuration is designed for super heavy-duty cutting with ultra-smooth performance and long term durability with a higher level of accuracy.




- The optional ZF 2-step gear box provides maximum torque up to 1,040 N·m (GA-3600), which can easily meet with heavy cutting requirements.

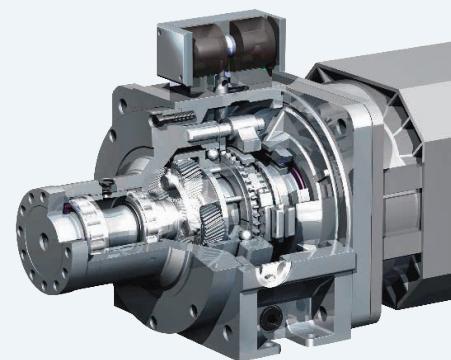


GA-2000 Series Spindle Output

High-Speed (Δ Connection) Spindle Output



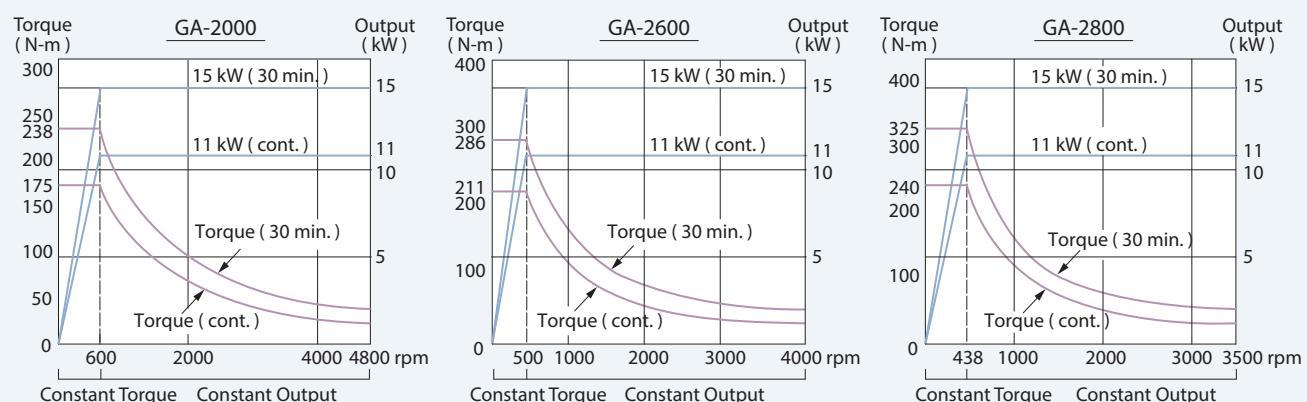


Low-Speed (Y Connection) Spindle Output



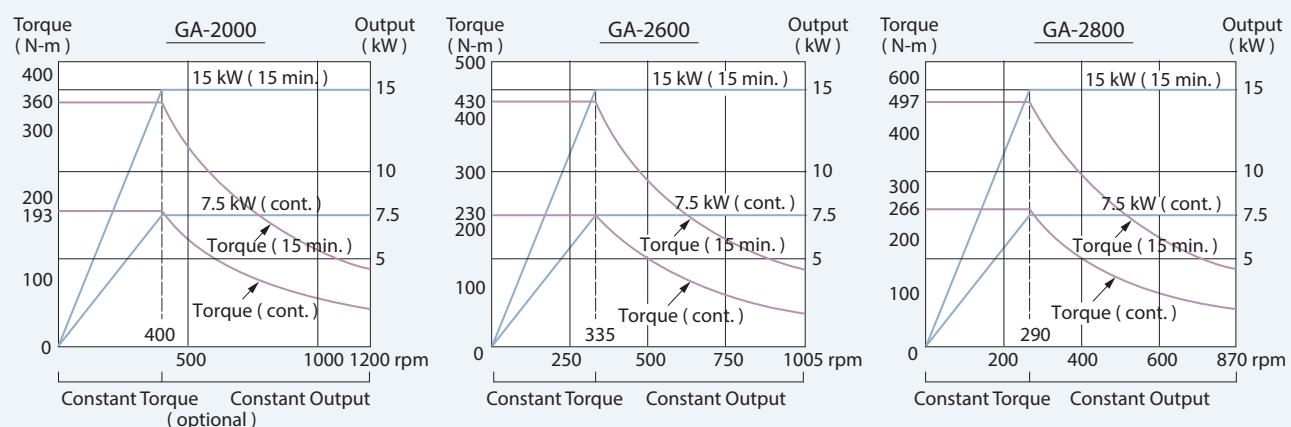


GA-3000 Series Standard Spindle Output

High-Speed (Δ connection) Spindle Output

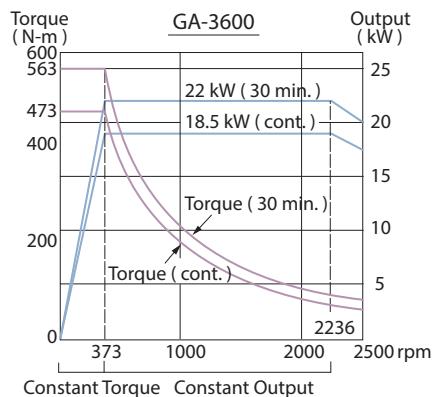
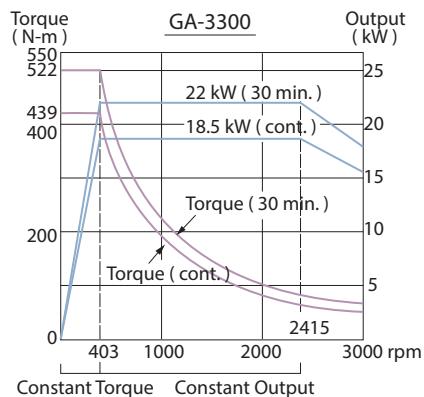
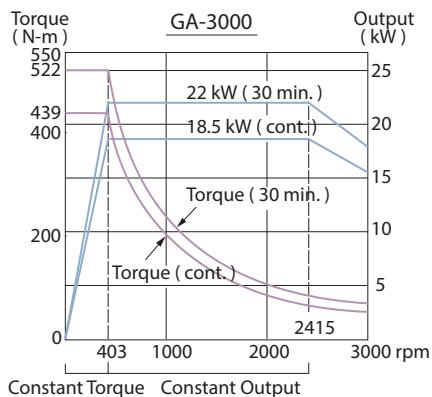


Low-Speed (Y connection) Spindle Output

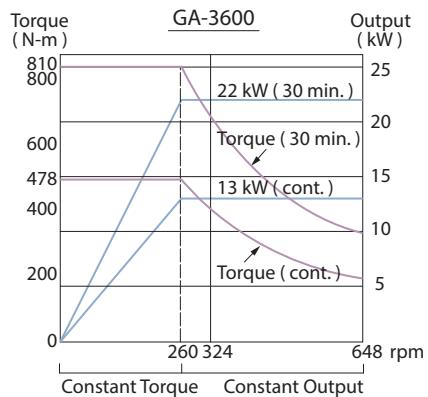
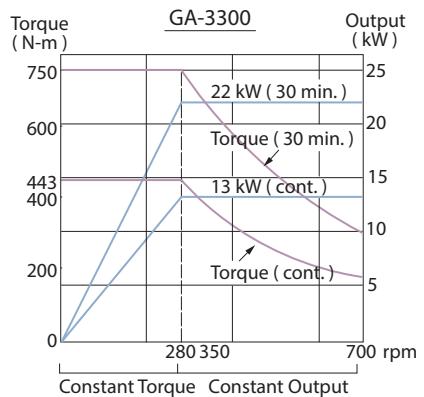
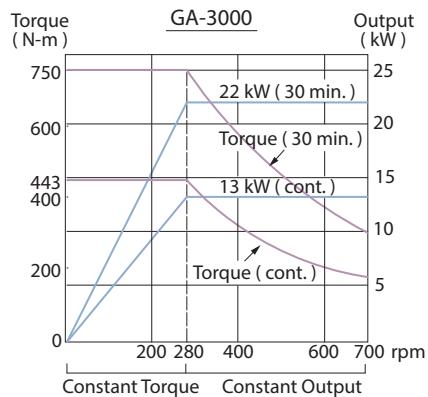


GA-3000 Series Optional ZF Gear Box Spindle Output

High Gear

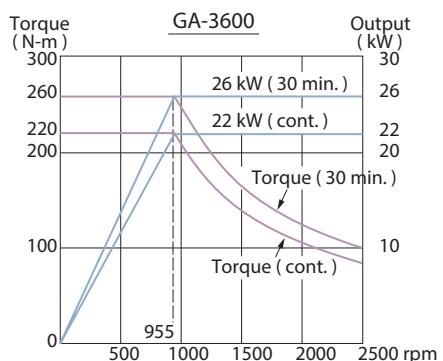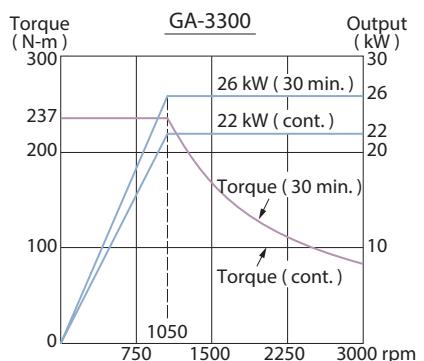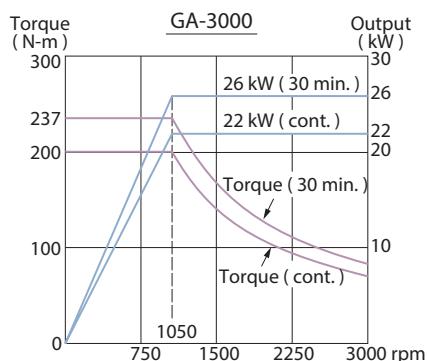



Low Gear

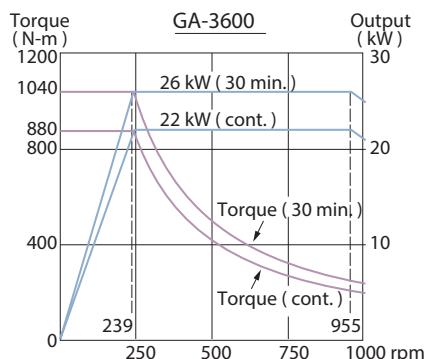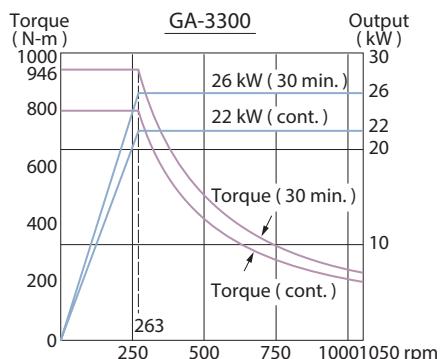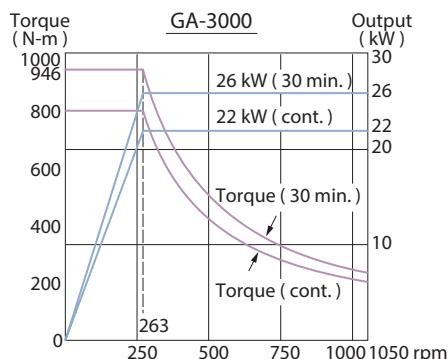

ADVANCED TURRET TECHNOLOGY

GA-2000 Series

- ▶ The heavy-duty servo indexing turret achieves 0.2 second indexing times for adjacent stations and 0.5 second for stations at the opposite end of the disk. Index movements are single step, without pauses, no matter how many stations are skipped.
- ▶ Ø 230 mm diameter super high precision curvic couplings accurately position the turret disk and 4,000 Kg of clamping force ensures abundant turret rigidity for all cutting conditions.
- ▶ The standard 12-station turret clears 8" diameter work holding devices without interference, even when loaded with tooling at maximum shank size. The optional 10-station turret clears 10" diameter work holding devices without interference, even when loaded with tooling at maximum shank size.

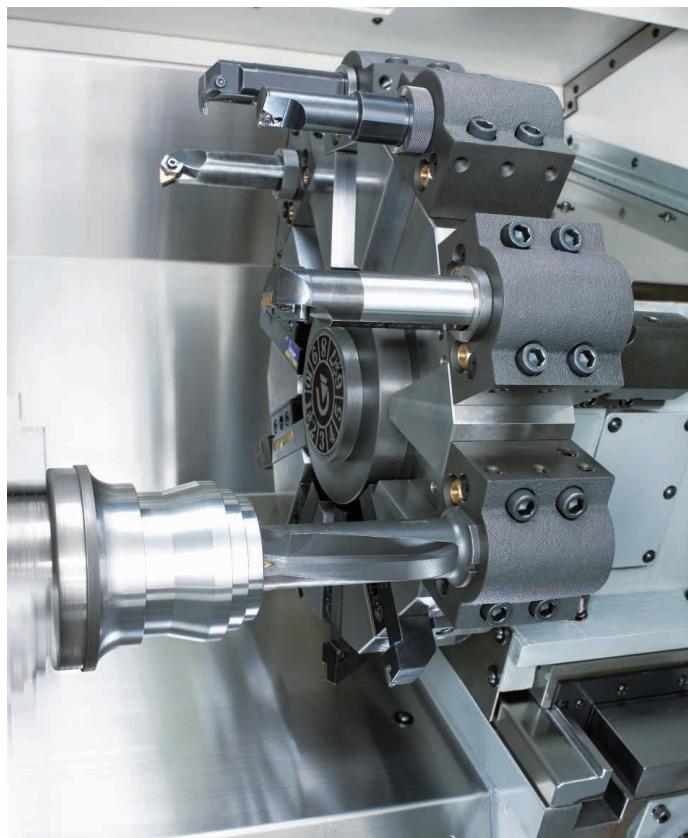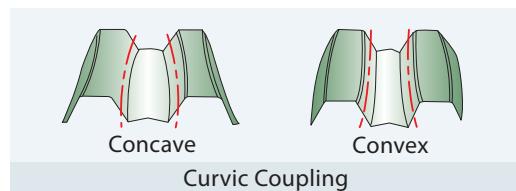


【 Standard 12-Station Turret 】

Tooling System


O.D. Tools □ 25	Clamping Block CV-3045 CV-3046	O.D. Tool Holder CV-3096B □ 25
Face Tools □ 25	Clamping Gib CV-3093	Face Tool Holder CZ-3107 □ 25
I.D. Tools	Sleeve	I.D. Tool Holder (Coolant Through) CV-3097
I.D. Tools	Sleeve	I.D. Tool Holder (Coolant Through) CZ-3108 Ø 40
Drill	Sleeve	Coolant Block CZ-3308
I.D. Tools (Coolant Through)	Sleeve (MT type)	

Interference Diagram

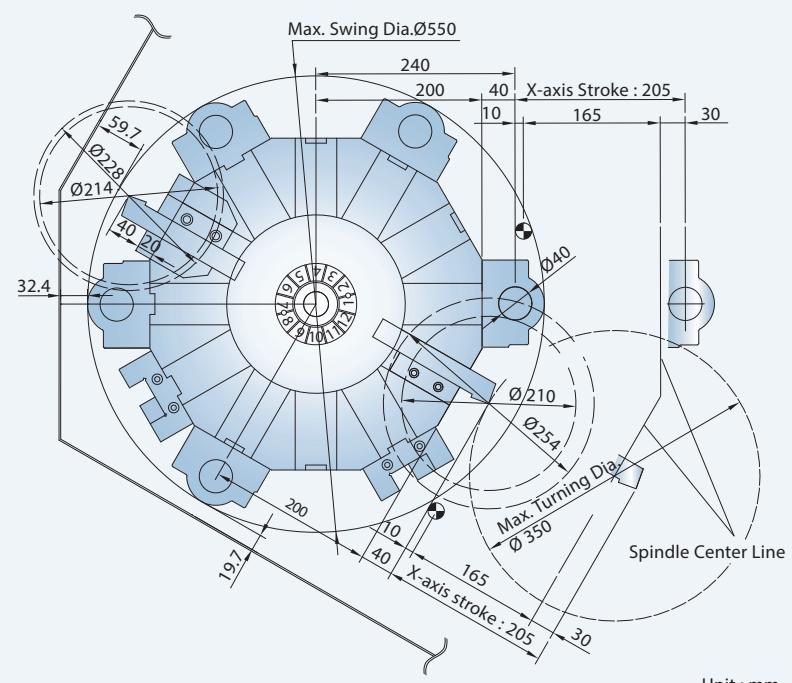

Work Range

9

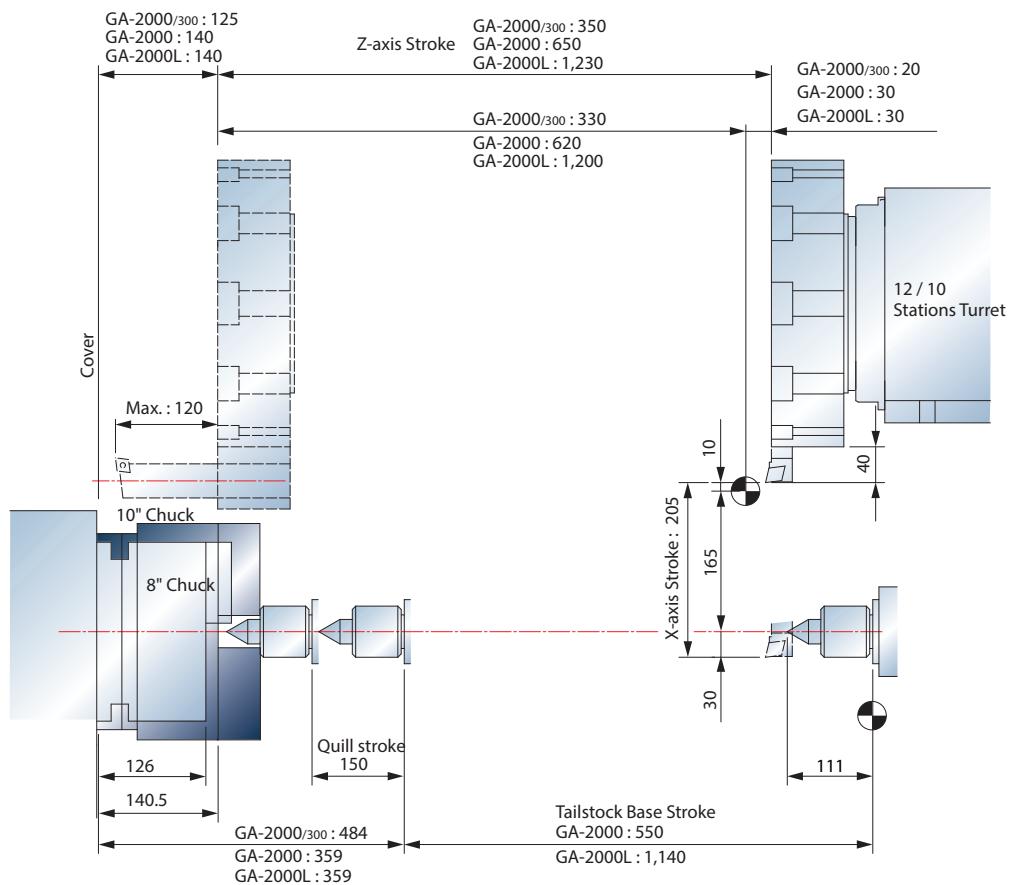


【 Optional 10-Stations Turret 】

Tooling System

O.D. Tools	25	Clamping Block	CV-3045 CV-3046
		O.D. Tool Holder	CV-3096B 25
Face Tools	25	Clamping Gib	CV-3093
		Face Tool Holder	CZ-3107 25
I.D. Tools			
I.D. Tools		Sleeve	
Drill		I.D. Tool Holder (Coolant Through)	CV-3097
I.D. Tools		Sleeve	CZ-3108 Ø 40
(Coolant Through)			
		Coolant Block	CZ-3308

Interference Diagram

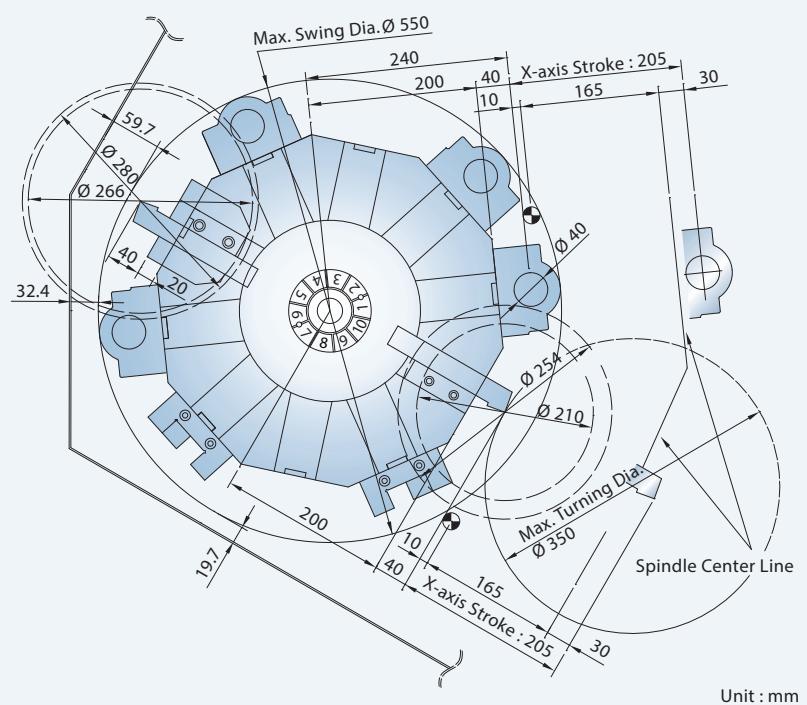


10

ADVANCED TURRET TECHNOLOGY


GA-3000 Series

- ▶ The heavy-duty servo indexing turret achieves 0.2 second indexing times for adjacent stations and 0.5 second for stations at the opposite end of the disk. Index movements are single step, without pauses, no matter how many stations are skipped.
- ▶ Ø 250 mm diameter super high precision curvic couplings accurately position the turret disk and 4,400 Kg of clamping force ensures abundant turret rigidity for all cutting conditions.
- ▶ The standard 12-station turret clears 8" diameter work pieces without interference, even when loaded with tooling at maximum shank size. The optional 10-station turret clears 10" diameter work pieces without interference, even when loaded with tooling at maximum shank size.

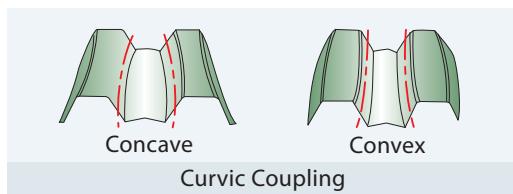


【 Standard 12-Station Turret 】

Tooling System

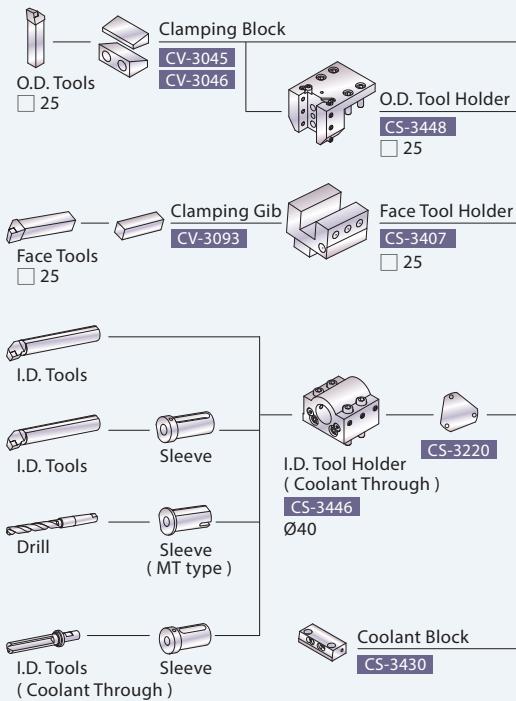


Interference Diagram

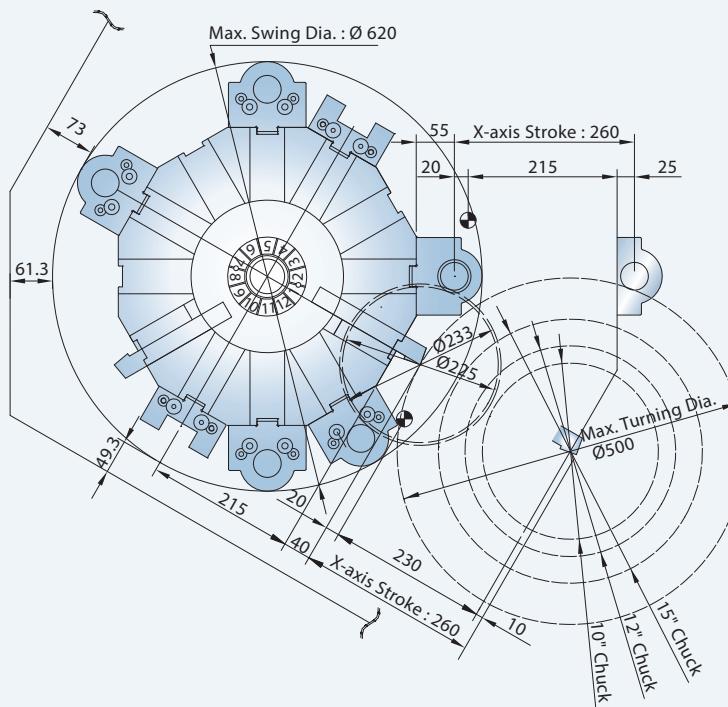


Work Range

11

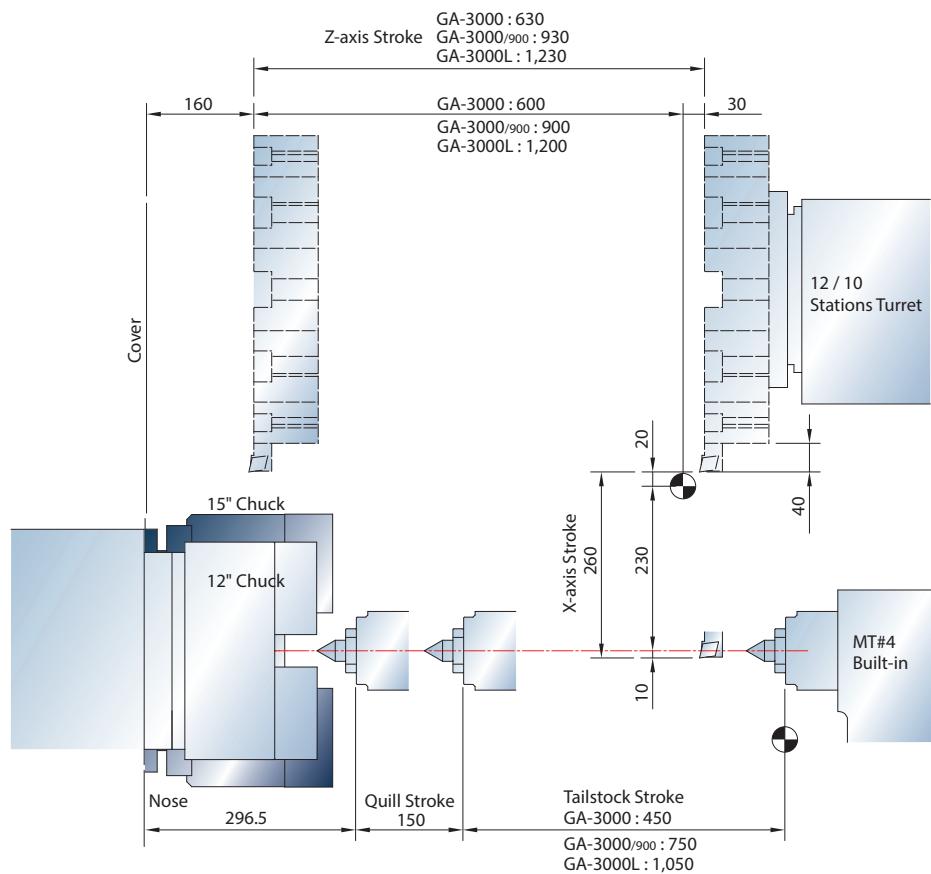


【 Optional 10-Stations Turret 】

Tooling System

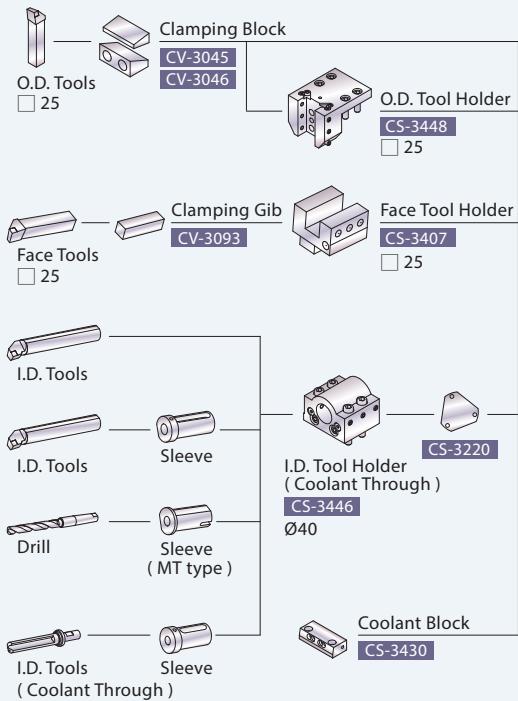


Interference Diagram

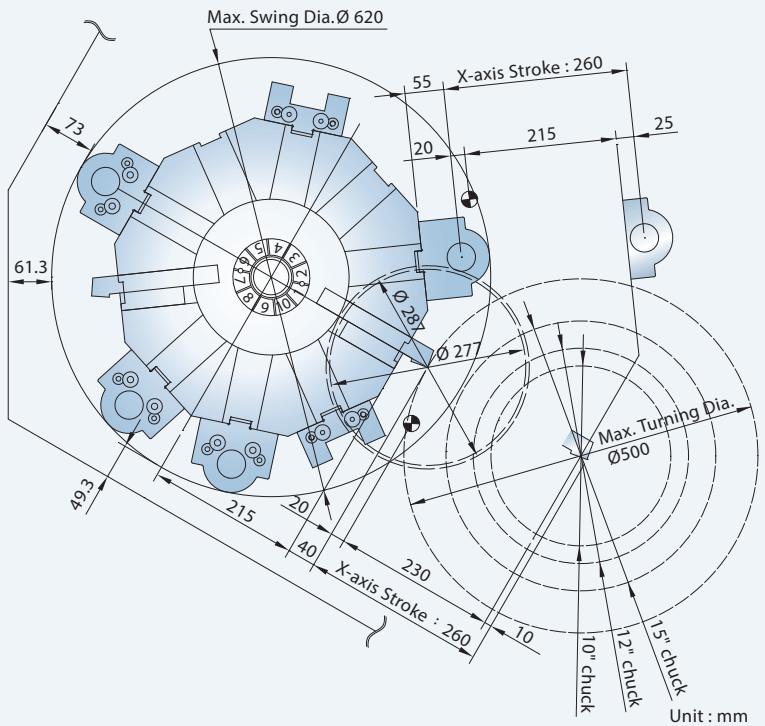

12


LIVE TOOLING TURRETS

- ▶ Live tooling capabilities on the GA series allows a work-piece to be turned, milled, drilled and tapped without moving it to another machine.
- ▶ The 12-station GOODWAY live tooling turret offers 12 stations available for live tooling (live tooling tools rotate in working position only) and features a non-lifting turret disk.
- ▶ GOODWAY's live tooling turret utilizes the latest servo indexing technology to achieve 0.2 second indexing times for adjacent stations and 0.5 second for stations at the opposite end of the disk.
- ▶ With the latest technology, live tooling is driven by an AC servo motor to provide ample power, in the form of torque. Now, even the toughest of jobs may be tackled without a sweat.

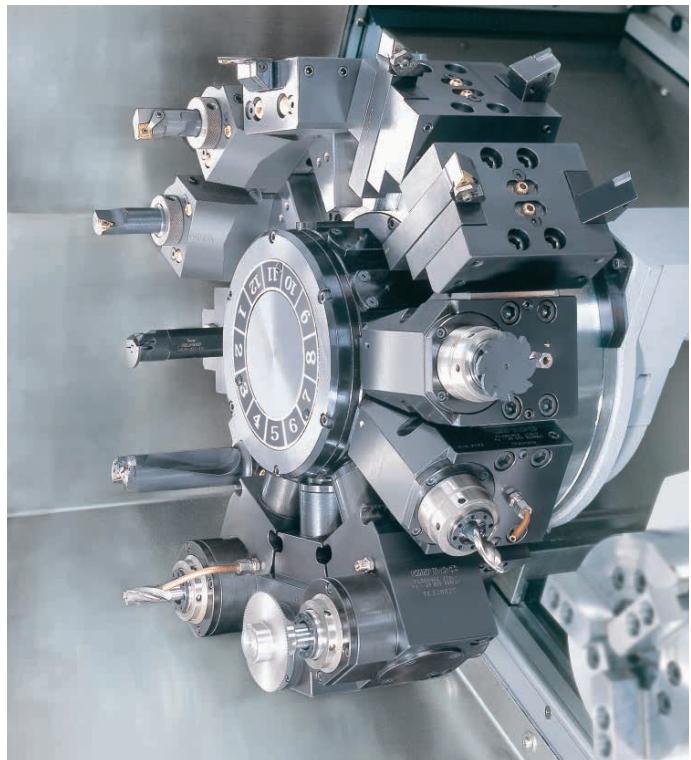


(Sub-spindle not available on GA series)

ULTIMATE C-AXIS SPINDLE

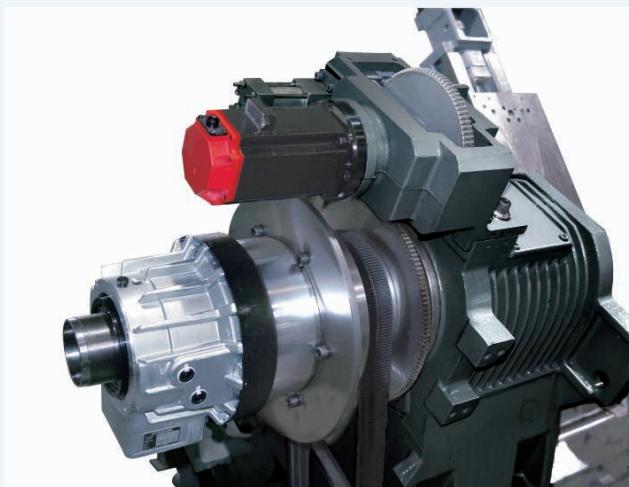


- ▶ With the FANUC servo motor generating an ultra high resolution of 33,000,000 pulses per spindle rotation and 480 N·m of torque, surface finishes are much superior than Cs-axis (driven by spindle motor) equipped machines. Plus, dynamic accuracy is within $\pm 0.02^\circ$ even under heavy cutting loads.

- ▶ The Cf-axis and disk brake system available on the GA series provides the most rigid and powerful type of C-axis on the market today. In Cf-axis mode, a servo motor is engaged and drives the rotation of the spindle, engagement time is less than 2 seconds.
- ▶ Working with the live tooling turret, the Cf-axis and disk brake system enables the machine to perform drilling, tapping, and milling operations, including cylindrical and polar coordinate interpolations (resembling a 4th-axis rotary table on a machining center).

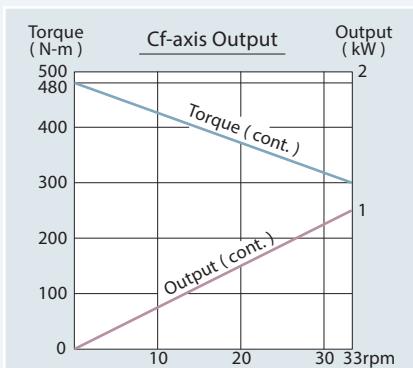



Live Tooling Turret Output

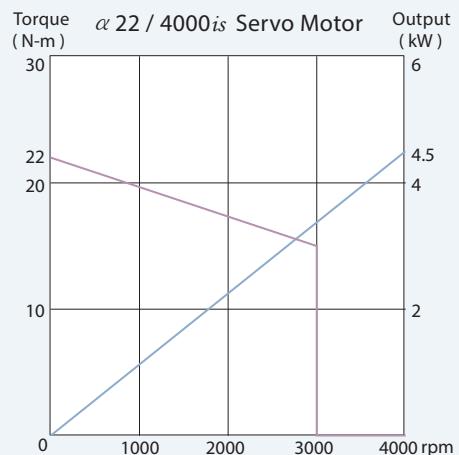

Machining Capability

Models		Tools (mm)	Spindle Speed (rpm)	Cutting Speed (m/min)	Feedrate (mm/min)	Cutting Depth (mm)
Drill		Ø 20	600	38	60	N/A
End Mill	GA-2000	Ø 20	1,000	63	200	12.7
Tapping	GA-3000	M16 * P2.0	200	10	400	N/A

Raw Material : S45C

Live Tooling Turret Specification

Models	Drive Motor Power (cont.)	Drive Motor	Max. Tapping Capacity	Max. Milling Capacity	Gear Ratio
GA-2000	4.5 kW	FANUC α 22 / 4000is	16 mm	Ø 20 mm	4 : 3
GA-3000					


Sample Work-Pieces




[12-Station Live Tooling Turret]

GA-2000 Series


Work Range

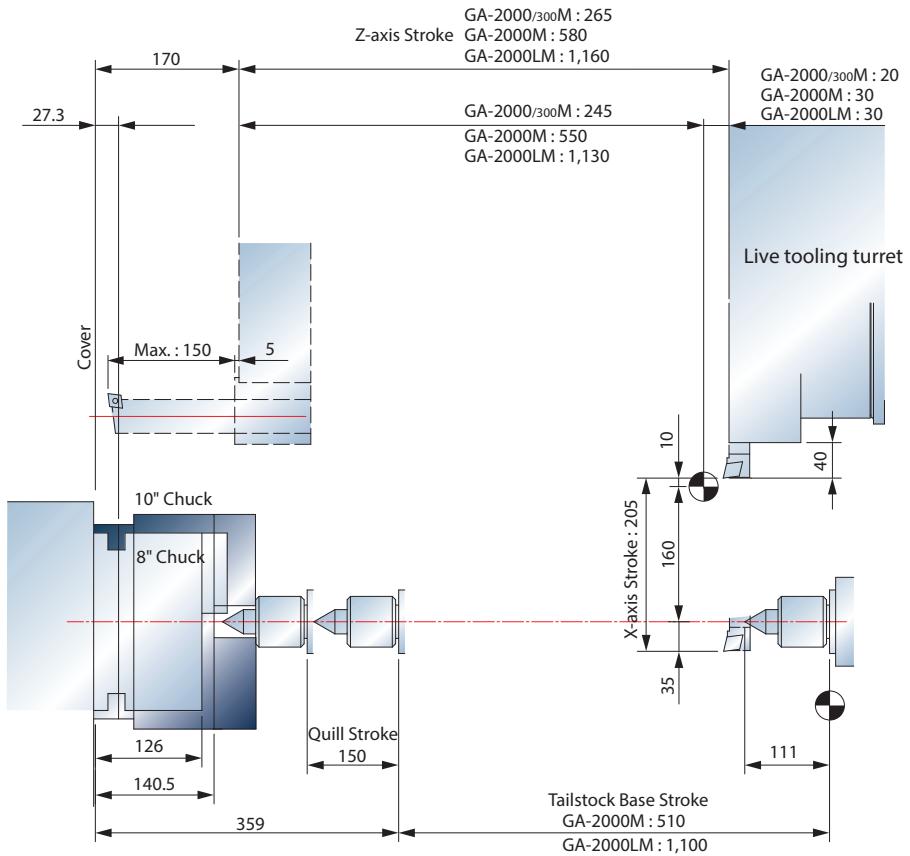

Tooling System

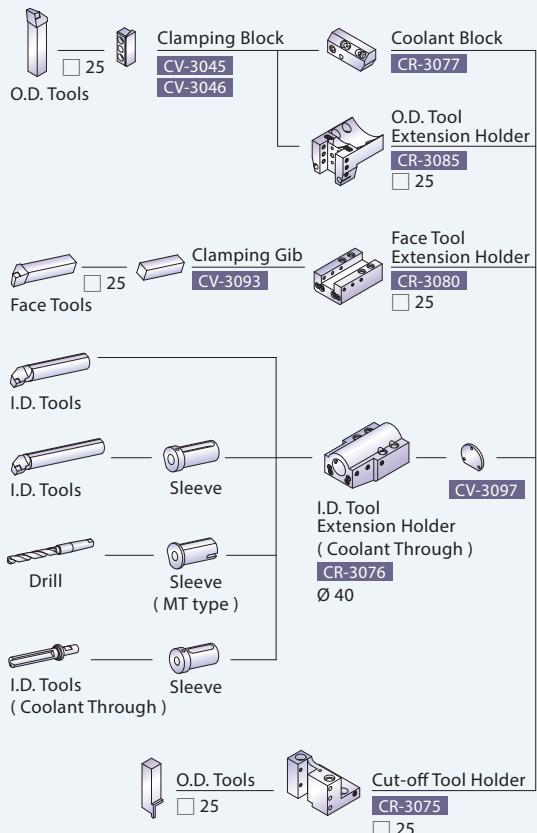

Interference Diagram

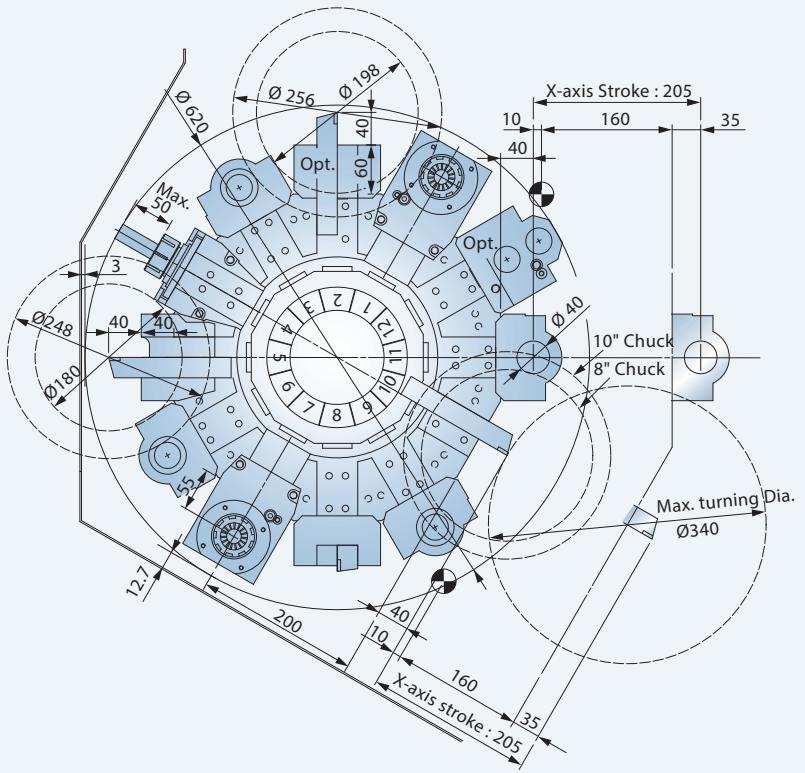


Unit : mm

[12-Station Live Tooling Turret]

GA-3000 Series


Work Range

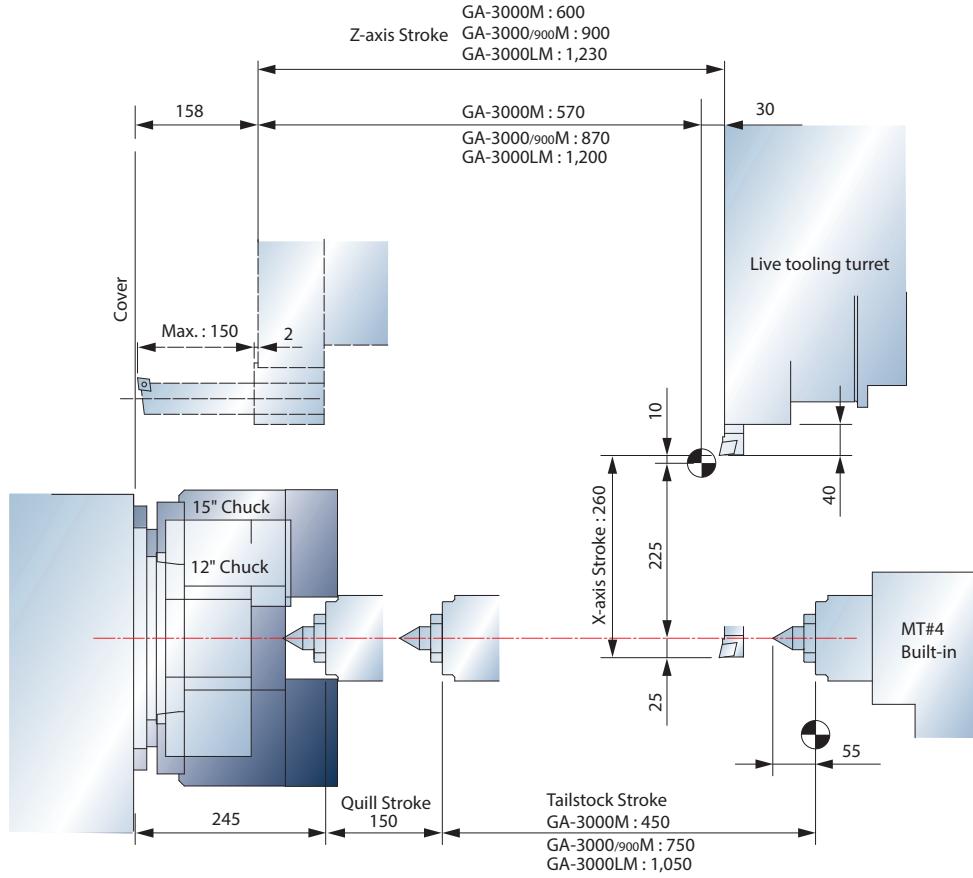


15

16

Tooling System

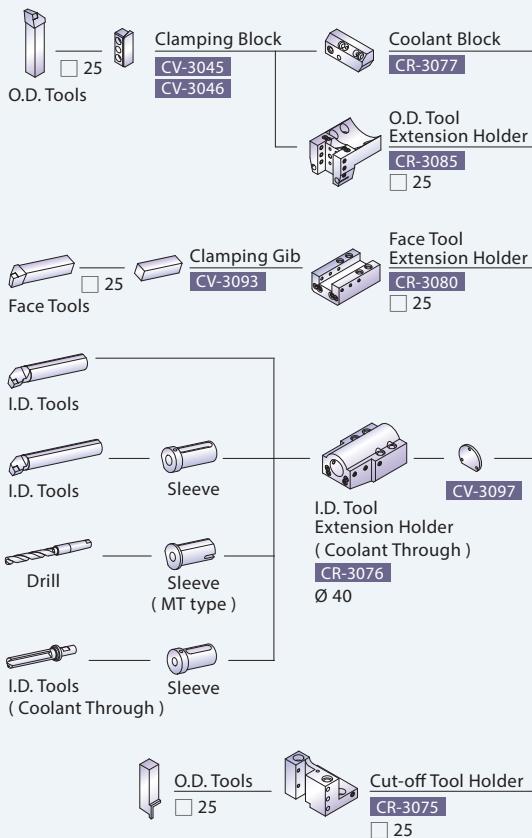

Interference Diagram

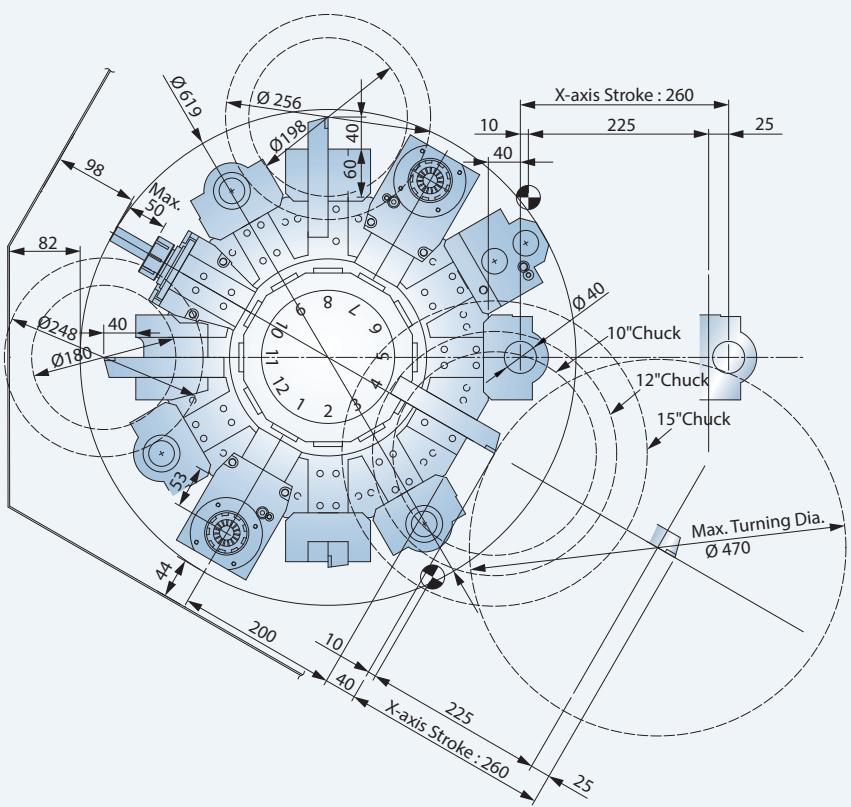

Unit : mm

LIVE TOOLING & SPECIAL TOOL HOLDERS

0° Live Tool Holder

O.D. drill & mill holder

- ER 32 collet



O.D. mill holder with combination mill arbor similar to DIN 6358



High speed O.D. drill & mill holder

- ER 20 collet
- Max. 8,000 rpm, ratio i=1 : 2



90° Live Tool Holder

Face drill & mill holder

- ER 32 collet



Dual-side face drill & mill holder

- ER 32 collet



High speed face drill & mill holder

- ER 32 collet
- Max. 8,000 rpm, ratio i=1 : 2



Dual-Face Turning Holder

GOODWAY dual-face turning holder allow both sides of a disk-type work-piece to be machined at the same time. Tool holder automatically spreads open for retracting tooling to avoid damage to the turned surfaces.




Simultaneous dual-face turning of disk brake

Fine adjustment of turning thickness


- ▶ Machining time is reduced by over 50%.
- ▶ Excellent surface quality by using a viper geometry ground insert.
- ▶ The angle of blades have been adjusted precisely to obtain the optimal surface accuracy of work-piece.
- ▶ Reduced vibration & increase parallelism accuracy utilizing symmetrical cutting pressure.

- ▶ Activating the live tool holder can be done by slightly adjust scale ring, in order to quickly and precisely adjust the thickness of cutting.
- ▶ Setups are easy with the integration of both hydraulic and spring activation.

MACHINING PERFORMANCE

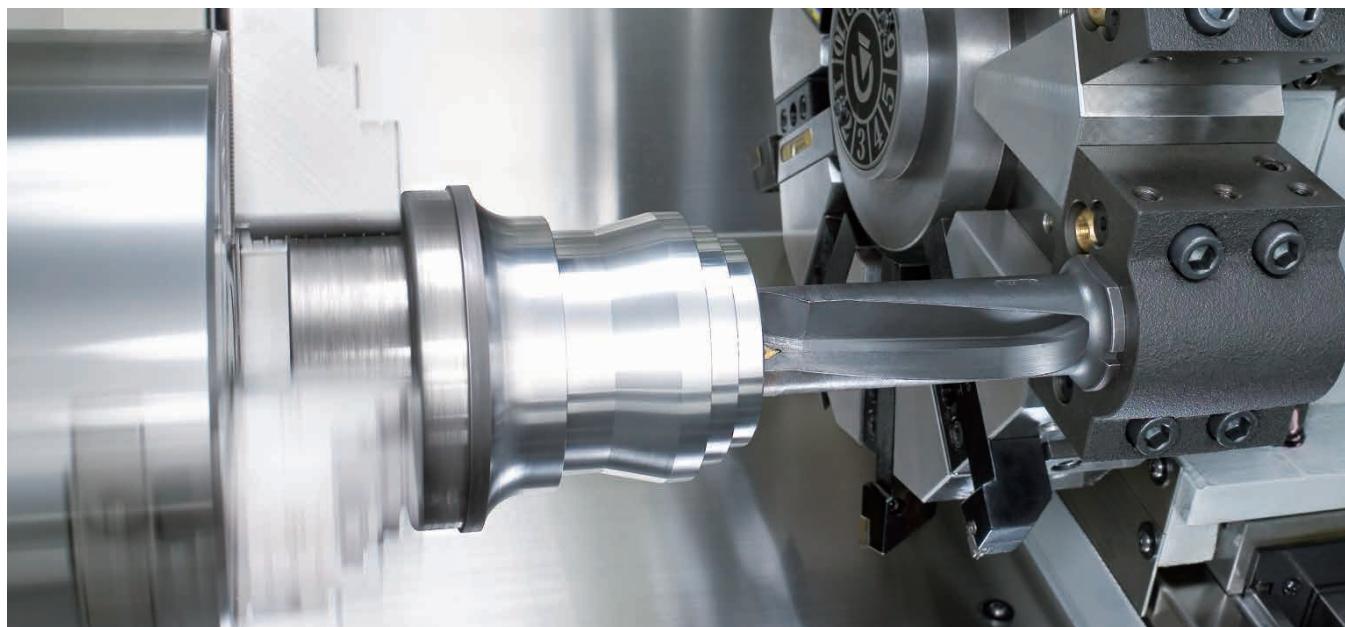

17
18

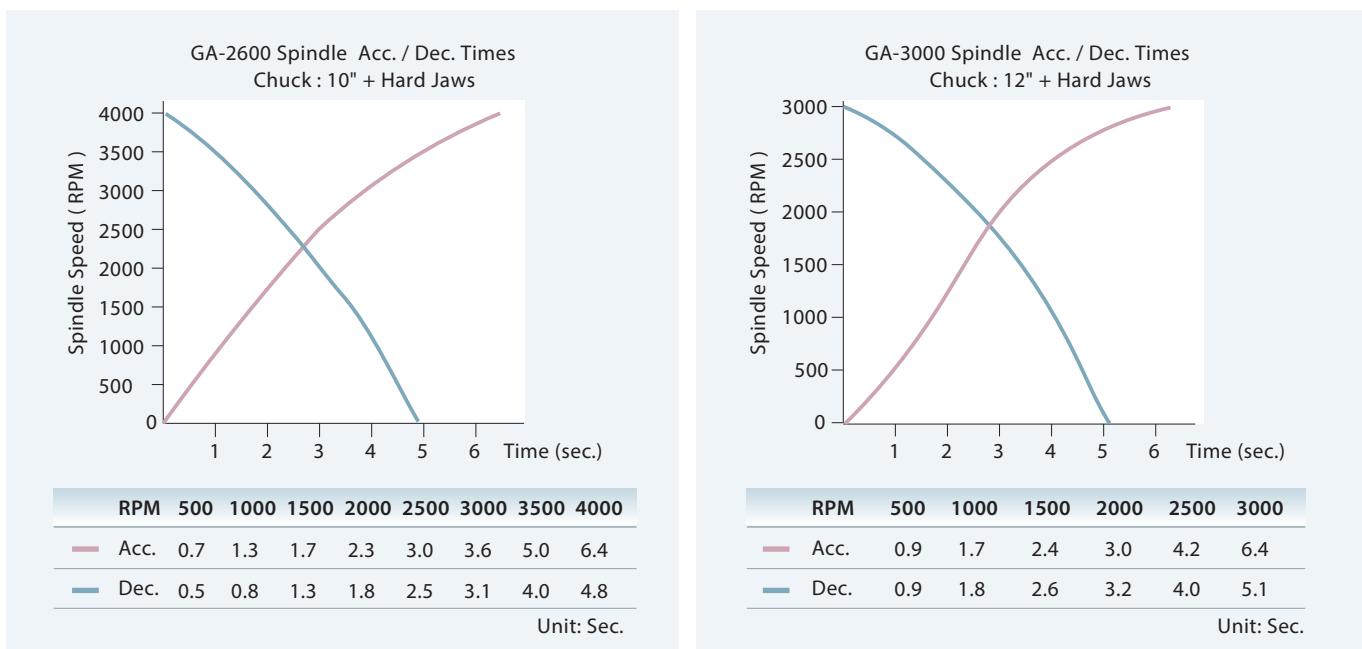



O.D. Heavy Cutting Example

GA-2000						
	O.D. Before Cut	O.D. After Cut	Spindle Speed	F / Rev.	Depth of Cut (side)	Spindle Load
1	108 mm	96 mm	500 RPM	0.30 mm	6 mm	97%
2	96 mm	82 mm	550 RPM	0.32 mm	7mm	112 %


GA-3000						
	O.D. Before Cut	O.D. After Cut	Spindle Speed	F / Rev.	Depth of Cut	Spindle Load
	144 mm	120 mm	729 RPM	0.40 mm	12 mm	65%

GENERAL DIMENSION

Space Requirement

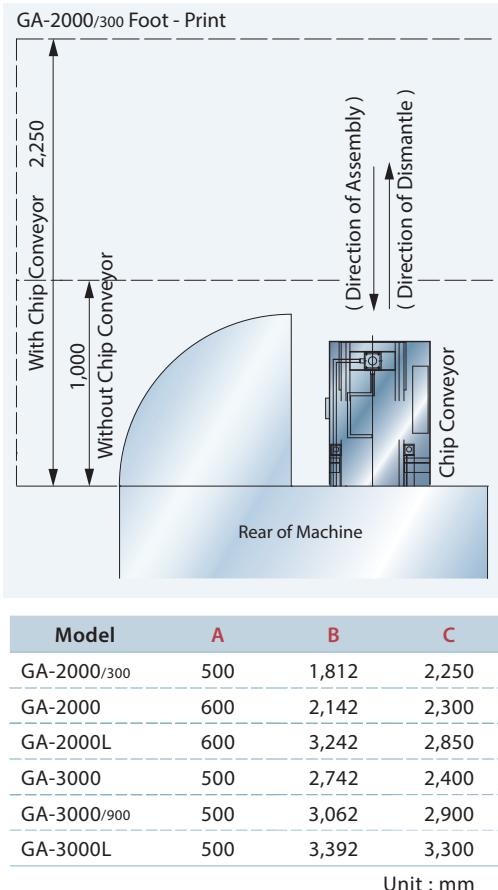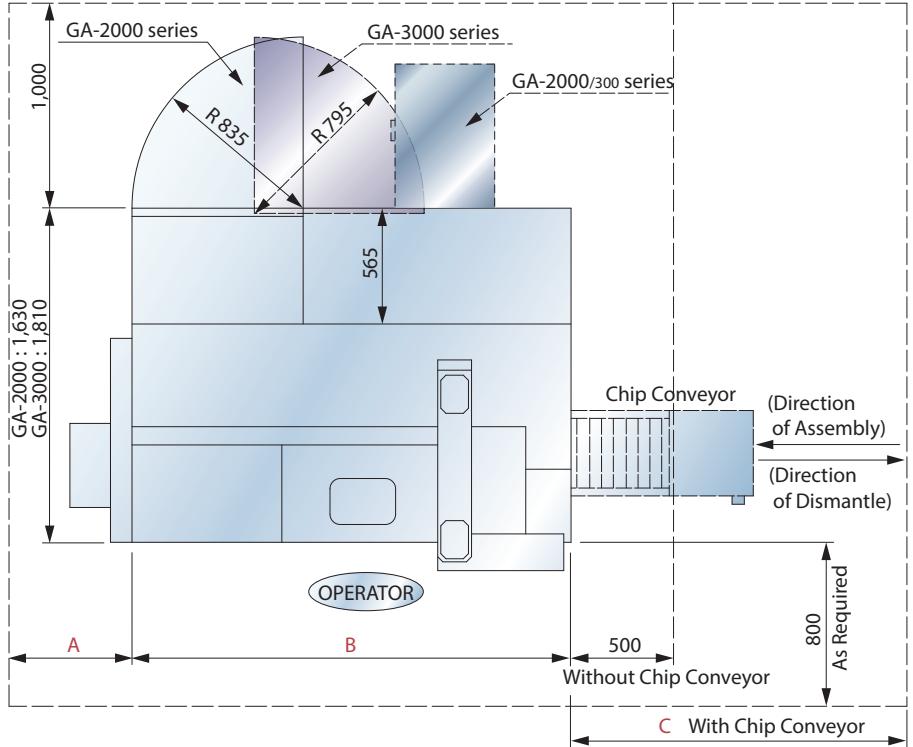

Machine Layout

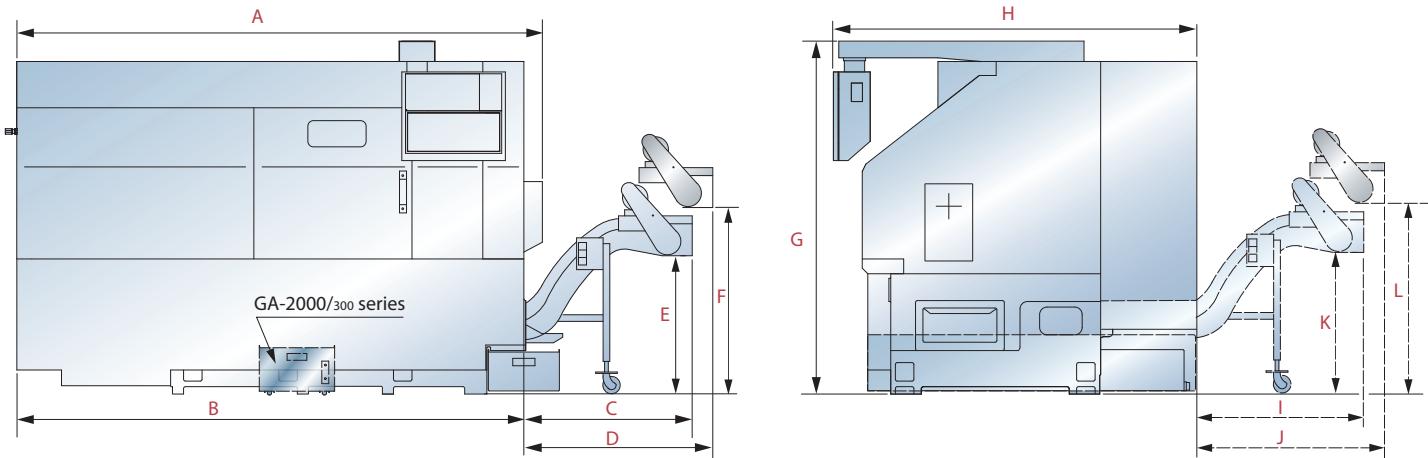

Model	A	B	C	D	E	F	G	H	I	J	K	L
GA-2000/300	2,014	1,812	-	-	-	-	1,725	1,630	730	1,055	843	1,232
GA-2000	2,445	2,142	984	1,245	685	1,205	1,890	1,630	875	765	705	1,206
GA-2000L	3,345	3,242	870	1,145	745	1,221	1,845	1,630	-	-	-	-
GA-3000	2,845	2,742	995	1,280	680	1,243	1,910	1,965	825	-	680	-
GA-3000/900	3,165	3,062	1,095	1,280	690	1,243	1,910	1,980	-	-	-	-
GA-3000L	3,642	3,392	995	1,258	656	1,209	1,910	1,965	-	-	-	-

Specifications are subject to change without notice.

Unit : mm

STANDARD & OPTIONAL FEATURES



Right discharge chip conveyor



Rear discharge chip conveyor

- ▶ The standard chip conveyor features adjustable timers that allow the operator to set operation intervals according to the amount of chips generated by the machine. Thus, reducing coolant loss to a minimum.

Models	Type	Hinge	Scraper	Magnet scraper
GA-2000/300	Right	-	-	-
	Rear	S	O	O
GA-2000 GA-3000	Right	S	O	O
	Rear	O	O	O
GA-2000L GA-3000/900 GA-3000L	Right	S	O	O
	Rear	-	-	-

S : Standard O : Option - : Not Available




Tool Setter (Opt.)

- ▶ The optional RENISHAW HPMA tool setter utilizes a motorized arm to lower the tool probe into position. An auto tool check function further increases tool touch off efficiency. (HPRA removeable-arm type tool setter on GA-3600 / L series)

Load Monitoring (Opt.)

- ▶ The load monitoring function is used to detect abnormal load of tools by monitoring the variation in spindle motor and servo motor loads during the cutting process. When abnormal loads are detected, the machine will stop at program end (M30) or immediately (feed hold status) according to tool life value or tool break value respectively.

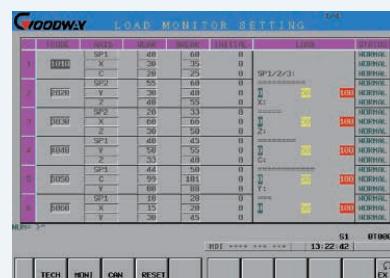

Parts Catcher (Opt.)

- ▶ Optional hydraulic parts catchers can be programmed to catch finished parts after cut-off.



Bar Feeder (Opt.)

- ▶ Optional bar feeding systems feed bars up to Ø 65 mm diameter.

FEATURES

S : Standard O : Option
- : Not Available C : Contact GOODWAY

		GA-2000	GA-2600	GA-2800	GA-3000	GA-3300	GA-3600
SPINDLE							
Main spindle motor configuration	Single-speed	S	S	S	S	S	S
	Two-speed	O	O	O	O	O	O
Rigid tapping & spindle orientation		S	S	S	S	S	S
Spindle disk brake		O	O	O	O	O	O
Cf-axis & spindle disk brake*1		O	O	O	O	O	O
WORK HOLDING							
	8"	S	-	-	-	-	-
Hydraulic hollow 3-jaw chuck	8" Big-Bore	-	O	-	-	-	-
	10"	-	S	-	S	-	-
	10" Big-Bore	-	-	S	-	-	-
Hard jaws	12"	-	-	-	-	S	-
Soft jaws	15"	-	-	-	-	-	S
Collet chuck	1 set	O	O	O	O	O	O
Special work holding chuck		S	S	S	S	S	S
In spindle work stopper		O	O	O	O	O	O
Spindle liner (guide bushing)		O	O	O	O	O	O
Foot switch for chuck operation	Single	S	S	S	S	S	S
	Double	O	O	O	O	O	O
Programmable base & quill hydraulic tailstock		S	S	S	S	S	S
MT#4 live center		O	O	O	-	-	-
MT#5 live center		-	-	-	O	O	O
Foot switch for tailstock operation	Single	O	O	O	O	O	O
	Double	O	O	O	O	O	O
Self-centering hydraulic steady rest		O	O	O	O	O	O
Foot switch for steady rest operation		O	O	O	O	O	O
Two-stage programmable pressure	Chuck clamping	O	O	O	O	O	O
	Tailstock thrust	O	O	O	O	O	O
TURRET							
10-station turret		O	O	O	O	O	O
12-station turret		S	S	S	S	S	S
12-station live tooling turret w/ no-lift tooling disk*1		O	O	O	O	O	O
Tool holder & sleeve package		S	S	S	S	S	S
Live tooling tool holders		O	O	O	O	O	O
MEASUREMENT							
RENISHAW HPMA tool presetter	Motorized arm	O	O	O	O	O	-
RENISHAW HPRA tool presetter		-	-	-	-	-	O
COOLANT							
Coolant pump	3 kg/cm ²	S	S	S	S	S	S
	5 kg/cm ²	O	O	O	O	O	O
High-pressure coolant system	20 kg/cm ²	O	O	O	O	O	O
Roll-out coolant tank		S	S	S	S	S	S
Oil skimmer		O	O	O	O	O	O
Coolant flow switch		O	O	O	O	O	O
Coolant level switch		O	O	O	O	O	O
Coolant intercooler system		O	O	O	O	O	O
CHIP DISPOSAL							
Chip conveyor with auto timer	Right discharge	S	S	S	S	S	S
	Rear discharge*2	O	O	O	O	O	O
Chip cart with coolant drain		O	O	O	O	O	O
Chuck air blow		O	O	O	O	O	O
Tailstock air blow		O	O	O	O	O	O
Coolant gun		O	O	O	O	O	O
Oil mist collector		O	O	O	O	O	O
AUTOMATIC OPERATION SUPPORT							
Parts catcher		O	O	O	O	O	O
Work-piece transport conveyor		O	O	O	O	O	O
Bar feeder		O	O	O	O	O	O
Bar feeder interface		O	O	O	O	O	O
Gantry-type loader / unloader		O	O	O	O	O	O
Auto door		O	O	O	O	O	O
Extra M-code output	4 sets (8)	O	O	O	O	O	O
	8 sets (16)	O	O	O	O	O	O
SAFETY							
Fully enclosed guarding		S	S	S	S	S	S
Door interlock (incl. Mechanical lock)		S	S	S	S	S	S
Tailstock stroke out - end check		S	S	S	S	S	S
Chuck cylinder stroke out - end check		S	S	S	S	S	S
Chuck cylinder check valve		S	S	S	S	S	S
Low hydraulic pressure detection switch		S	S	S	S	S	S
Over travel (soft limit)		S	S	S	S	S	S
Load monitoring function		O	O	O	O	O	O
OTHERS							
Fluorescent work light		S	S	S	S	S	S
Electrical cabinet	Heat exchanger	S	S	S	S	S	S
	A/C cooling system	O	O	O	O	O	O
Complete hydraulic system		S	S	S	S	S	S
Hydraulic oil intercooler system		S	S	S	S	S	S
Advanced auto lubrication system		S	S	S	S	S	S
Foundation leveling & maintenance tool kit		S	S	S	S	S	S
Emergency maintenance electrical part package		S	S	S	S	S	S
Operation & maintenance manuals		S	S	S	S	S	S

S : Standard O : Option
- : Not Available C : Contact GOODWAY

FANUC CONTROL FUNCTIONS

		Oi-TF	311
Display	8.4" color LCD	S	O
	10.4" color LCD	-	S
Graphic function	Standard	S	S
	Dynamic	O	O
Part program storage size	512 K bytes	S	-
	1 M bytes	-	S
	2 M bytes	O	O
	4 M bytes	-	O
	8 M bytes	-	O
	400	S	-
Registerable programs	1,000	O	S
	4,000	-	O
	99	-	S
	128	S	-
Tool offset pairs	200	O	O
	400	-	O
	499	-	O
	999	-	O
	2000	-	O
Servo HRV control	HRV 3	S	S
Automatic data backup		S	S
Synchronous / Composite control		O	O
Inch / metric conversion		S	S
Polar coordinate interpolation		S	S
Cylindrical interpolation		S	S
Multiple repetitive cycle		S	S
Rigid tapping		S	S
Unexpected disturbance torque detection function		S	S
Spindle orientation		S	S
Constant surface speed control		S	S
Spindle speed fluctuation detection		S	S
Embedded macro		O	O
Spindle synchronous control		S	S
Background editing		S	S
Tool radius / Tool nose radius compensation		S	S
Multi-language display		S	S
Cs contouring control		S	S
Polygon turning		S	S
Helical interpolation		O	O
Direct drawing dimension programming		S	S
Thread cutting retract		S	S
Variable lead threading		S	S
Multiple repetitive cycle II		S	S
Canned cycles for drilling		S	S
Tool nose radius compensation		S	S
Chamfering / Corner R		S	S
AI contour control I		O	S
Multi part program editing*1		S	S
Manual handle retrace		O	O
Manual intervention and return		S	O
External data input		S	S
Addition of custom macro		S	S
Increment system C		S	S
Run hour & parts counter		S	S
Auto power-off function		S	S
RS-232 port		S	S
Memory card input / output (CF + USB)		S	S
Ethernet		S	S

Specifications are subject to change without notice.

*1 Standard on "M" models.

*2 GA-2000/300 models & GA-3000 series models only.

4-Jaw Chuck (Opt.)




21
22

Air Chuck (Opt.)



Automatic Steady Rest (Opt.)

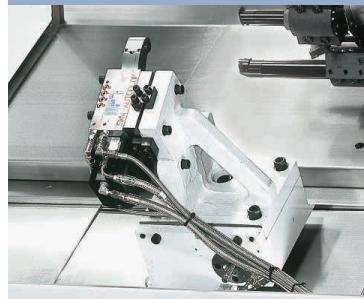

Electrical Cabinet A/C (Opt.)



Parts Conveyor (Opt.)



MACHINE SPECIFICATIONS

CAPACITY	GA-2000	GA-2600	GA-2800	
Max. swing diameter		Ø 580 mm		
Swing over saddle		Ø 400 mm		
Max. turning diameter		Ø 350 mm		
Std. turning diameter		Ø 203 mm (8") / Ø 254 mm (10")		
Max. turning length*1	309 / 624 / 1,204 mm	291 / 606 / 1,186 mm	260 / 575 / 1,155 mm	
Max. work piece weight*2	170 kg	230 kg	250 kg	
Chuck size	Ø 8"	Ø 10"	Ø 10" (Big-Bore)	
Bar capacity	Ø 51 mm	Ø 65 mm	Ø 77 mm	
SPINDLE				
Hole through draw tube	Ø 52 mm	Ø 65.5 mm	Ø 78 mm	
Hole through spindle	Ø 66 mm	Ø 76 mm	Ø 90 mm	
Spindle bearing diameter	Ø 100 mm	Ø 120 mm	Ø 130 mm	
Hydraulic cylinder	8"	10"	10" (Big-Bore)	
Spindle nose	A2-6	A2-8	A2-8	
Motor output (cont.)		11 kW		
Motor output (30 min.)		15 kW		
Motor full output speed		750 RPM		
Spindle drive system		Direct Belt Drive		
Spindle drive ratio	4 : 5	2 : 3	7 : 12	
Spindle speed range	48 ~ 4,800 RPM	40 ~ 4,000 RPM	35 ~ 3,500 RPM	
Spindle full output speed	600 RPM	500 RPM	440 RPM	
Spindle torque (30 min.)	238 N·m	286 N·m	325 N·m	
Spindle torque (peak)	175 N·m	211 N·m	240 N·m	
2-SPEED SPINDLE (OPTIONAL)				
Spindle speed ranges	L H	20 ~ 1,200 RPM 1,201 ~ 4,800 RPM	20 ~ 1,000 RPM 1,001 ~ 4,000 RPM	20 ~ 875 RPM 876 ~ 3,500 RPM
Spindle full output speed	L H	400 RPM 600 RPM	333 RPM 500 RPM	291 RPM 440 RPM
Spindle torque (15 min.)	L	360 N·m	430 N·m	497 N·m
Spindle torque (30 min.)	H	238 N·m	286 N·m	325 N·m
Cf-AXIS SPINDLE (OPTIONAL)				
Drive type		AC Servo Motor 0.7 kW		
Torque output / Max. speed		240 N·m / 33 RPM		
X & Z AXES				
Max. X-axis travel*3		205 mm		
Max. Z-axis travel*1		350 / 650 / 1,230 mm		
X / Z axes rapids		20 / 24 m/min.		
Slide way type		Hardened & Ground Box Ways		
Feed rates		1 ~ 4,800 mm/min.		
X-axis servo motor		AC 2.7 kW (3.6 HP)		
Z-axis servo motor		AC 2.7 kW (3.6 HP)		
X-axis ball screw Ø / pitch		Ø 32 mm / 8 mm		
Z-axis ball screw Ø / pitch		Ø 36 mm / 8 mm		
X / Z axes thrust (cont.)		962 kg		

Specifications are subject to change without notice.

*1 GA-2000/300 / GA-2000 / GA-2000L

*2 Work-piece supported by chuck & tailstock.

*3 Individual models may vary, please see interference drawings.

CAPACITY	GA-3000	GA-3300	GA-3600	
Max. swing diameter		Ø 600 mm		
Swing over saddle		Ø 500 mm		
Max. turning diameter		Ø 500 mm		
Std. turning diameter		Ø 225 mm		
Max. turning length*4	629 / 929 / 1,229 mm	624 / 924 / 1,224 mm	596 / 896 / 1,196 mm	
Max. work piece weight*2	340 kg	340 kg	340 kg	
Chuck size	Ø 10" (12")	Ø 12" (15")	Ø 15"	
Bar capacity	Ø 75 mm	Ø 90 mm	Ø 105 mm	
SPINDLE				
Hole through draw tube	Ø 75.5 mm	Ø 90.5 mm	Ø 105.5 mm	
Hole through spindle	Ø 90 mm	Ø 101 mm	Ø 121 mm	
Spindle bearing diameter	Ø 130 mm	Ø 140 mm	Ø 160 mm	
Hydraulic cylinder	10"	12"	15"	
Spindle nose	A2-8	A2-8	A2-11	
Motor output (cont.)		18.5 kW		
Motor output (30 min.)		22 kW		
Motor full output speed		400 / 575 RPM		
Spindle drive system		Direct Belt Drive		
Spindle drive ratio	7 : 10	7 : 10	35 : 54	
Spindle speed range	30 ~ 3,000 RPM	30 ~ 3,000 RPM	25 ~ 2,500 RPM	
Spindle full output speed	403 RPM	403 RPM	373 RPM	
Spindle torque (30 min.)	522 N·m	522 N·m	563 N·m	
Spindle torque (peak)	439 N·m	439 N·m	473 N·m	
ZF GEAR BOX SPINDLE (OPTIONAL)				
Spindle speed ranges	L H	30 ~ 1,050 RPM 1,050 ~ 3,000 RPM	30 ~ 1,050 RPM 1,050 ~ 3,000 RPM	30 ~ 1,000 RPM 1,000 ~ 2,500 RPM
Spindle full output speed	L H	263 RPM 1,050 RPM	263 RPM 1,050 RPM	239 RPM 955 RPM
Spindle torque (15 min.)	L	946 N·m	946 N·m	1,040 N·m
Spindle torque (30 min.)	H	237 N·m	237 N·m	260 N·m
Cf-AXIS SPINDLE (OPTIONAL)				
Drive type		AC Servo Motor 1.4 kW		
Torque output / Max. speed		480 N·m / 33 RPM		
X & Z AXES				
Max. X-axis travel*3		260 mm		
Max. Z-axis travel*4		630 / 930 / 1,230 mm		
X / Z axes rapids		20 / 24 m/min.		
Slide way type		Hardened & Ground Box Ways		
Feed rates		1 ~ 4,800 mm/min.		
X-axis servo motor		AC 2.7 kW (4 HP)		
Z-axis servo motor		AC 4.5 kW (6 HP)		
X-axis ball screw Ø / pitch		Ø 36 mm / 8 mm		
Z-axis ball screw Ø / pitch		Ø 45 mm / 10 mm		
X / Z axes thrust (cont.)		962 kg / 1,411 kg		

*4 GA-3000 / GA-3000/900 / GA-3000L

MACHINE SPECIFICATIONS

TURRET	GA-2000	GA-2600	GA-2800
Stations		12 Std. / 10 Opt.	
Indexing drive		AC Servo motor	
Indexing speed	0.2 sec. Adjacent / 0.5 sec. 180 degrees (Single step)		
Accuracy	Positioning: $\pm 0.00069^\circ$, Repeatability: $\pm 0.00027^\circ$		
O.D. tool shank size		<input type="checkbox"/> 25 mm	
I.D. tool shank size		\emptyset 40 mm	
LIVE TOOLING TURRET (OPTIONAL)			
Stations		12	
Live tooling stations		12	
Live tooling drive type	4.5 kW , 22 N-m (Intermittent) AC Servo motor		
Indexing drive type		AC Servo motor	
Index speed	0.2 sec. Adjacent / 0.5 sec. 180 degrees (Single step)		
O.D. tool shank size		<input type="checkbox"/> 25 mm	
I.D. tool shank size		\emptyset 40 mm	
Live tooling shank size		ER 32	
Live tooling RPM range		40 ~ 4,000 RPM	
TAILSTOCK			
Quill center taper		MT#4 (Live Center)	
Quill diameter / travel		\emptyset 70 mm / 150 mm	
Tailstock base travel*1		Fixed / 550 mm / 1,140 mm	
Programmable quill / base	Yes / Yes (Not available on GA-2000/300 series)		
Programmable base type		Positioned by Z-axis carriage	
PARTS CATCHER (OPTIONAL)			
Max. part diameter		\emptyset 77 mm	
Max. part length		150 mm	
GENERAL			
Positioning accuracy		0.01 mm	
Repeatability		± 0.003 mm	
Standard CNC control		FANUC Oi-TF	
Voltage / Power requirement	AC 200 / 220 +10% to -15% 3 phase / 26 kVA		
Hydraulic tank capacity		30 / 40 / 40 L	
Coolant tank capacity		145 L (GA-2000/300 : 100 L)	
Coolant pump		3 bar rated at 42.6 PSI	
Machine weight*1		3,500 / 4,000 / 4,600 kg	
Dimensions L × W × H*1	2,014 x 1,812 x 1,725 / 2,445 x 1,630 x 1,890 / 3,345 x 1,630 x 1,845 mm Machine w/ chip conveyor : 2,014 x 2,360 x 1,725 / 3,429 x 1,630 x 1,890 / 4,112 x 1,630 x 1,845 mm		

Specifications are subject to change without notice.

*1 GA-2000/300 / GA-2000 / GA-2000L

TURRET	GA-3000	GA-3300	GA-3600
Stations		12 Std. / 10 Opt.	
Indexing drive		AC Servo motor	
Indexing speed	0.3 sec. Adjacent / 0.5 sec. 180 degrees (Single step)		
Accuracy	Positioning: $\pm 0.00069^\circ$, Repeatability: $\pm 0.00027^\circ$		
O.D. tool shank size		<input type="checkbox"/> 25 mm	
I.D. tool shank size		$\emptyset 40$ mm ($\emptyset 50$ mm Opt.)	
LIVE TOOLING TURRET (OPTIONAL)			
Stations		12	
Live tooling stations		12	
Live tooling drive type	4.5 kW , 22 N-m (Intermittent) AC Servo motor		
Indexing drive type		AC Servo motor	
Index speed	0.2 sec. Adjacent / 0.5 sec. 180 degrees (Single step)		
O.D. tool shank size		<input type="checkbox"/> 25 mm	
I.D. tool shank size		$\emptyset 40$ mm ($\emptyset 50$ mm Opt.)	
Live tooling shank size		ER 32	
Live tooling RPM range		40 ~ 4,000 RPM	
TAILSTOCK			
Quill center taper	MT#5 (Live center) [MT#4 (Dead center) Opt.]		
Quill diameter / travel		$\emptyset 110$ mm / 150 mm	
Tailstock base travel*2		450 mm / 750 mm / 1,050 mm	
Programmable quill / base		Yes / Yes	
Programmable base type		Positioned by Z-axis carriage	
PARTS CATCHER (OPTIONAL)			
Max. part diameter		$\emptyset 105$ mm	
Max. part length		180 mm	
GENERAL			
Positioning accuracy		0.01 mm	
Repeatability		± 0.003 mm	
Standard CNC control		FANUC Oi-TF	
Voltage / Power requirement	AC 200 / 220 +10% to -15% 3 phase / 38 kVA		
Hydraulic tank capacity		40 L	
Coolant tank capacity		145 L	
Coolant pump		3 bar rated at 42.6 PSI	
Machine weight*2		5,800 / 6,500 / 7,000 kg	
Dimensions L × W × H*2	2,845 x 1,965 x 1,910 / 3,165 x 1,980 x 1,910 / 3,642 x 1,965 x 1,910 mm Machine w/ chip conveyor : 3,840 x 1,965 x 1,910 / 4,160 x 1,980 x 1,910 / 4,637 x 1,965 x 1,910 mm		

Specifications are subject to change without notice.

*2 GA-3000 / GA-3000/900 / GA-3000L



GOODWAY MACHINE CORP.



GOODWAYCNC.com

HEADQUARTERS

No.13, 5Th Road,
Taichung Industrial Park,
Taichung City, 407, Taiwan, R.O.C.
E-mail : goodway@goodwaycnc.com

CENTRAL TAIWAN SCIENCE PARK BRANCH

No. 38, Keyuan Road,
Central Taiwan Science Park.Taichung,
Taichung City, 407, Taiwan, R.O.C.
TEL : + 886-4-2463-6000
FAX : + 886-4-2463-9600

GOODWAY MACHINE (WUJIANG) CO.,LTD

No. 4888, East Lake Taihu Avenue, Wujiang
Economic and Technological Development Zone,
Jiangsu, China
Sales Hotline : + 86-512-8286-8068
Service Hotline : + 86-512-8286-8066
FAX : + 86-512-8286-8620
E-mail : goodway@goodwaycnc.cn

